

# DragonFire Racing

2330 W. Broadway Rd #112

Mesa, AZ 85202

1 (800) 708-9803

[WWW.DRAGONFIRERACING.COM](http://WWW.DRAGONFIRERACING.COM)



**FEEL THE HEAT!**

## XP Receiver Hitch Installation Instructions

Congratulations on your purchase of the DragonFire XP Receiver Hitch. Now you can get a hitch on your Polaris RZR XP & XP 4. Designed to bolt-on your RZR and featuring a 2" receiver this is the perfect solution for your receiver woes.

### **WARNING**

- \*Do not use if there is any sign of damage to product
- \* Not intended for use with tongue weight exceeding 500lbs
- \* Having hitch installed may increase wheelbase and lower ground clearance


### **Disclaimer**

Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

Tools Required
15mm Wrench & Socket
Floor Jack


Step 1: Place vehicle on a flat and level surface, place gear selector in park, remove keys.

Step 2: Jack vehicle up so that rear tires are barely touching the ground. (See Figure 1)

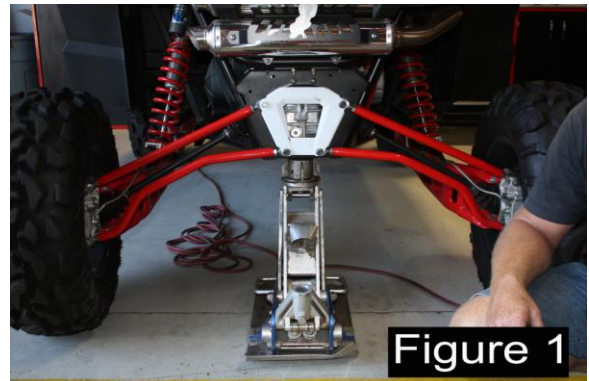


Dragonfire Racing

Step 3: Remove 4 factory 10mm bolts using a 15mm socket and wrench from the rear gusset plate. Gusset plate will not be re-used. Bolts will be re-used. (See Figure 2)

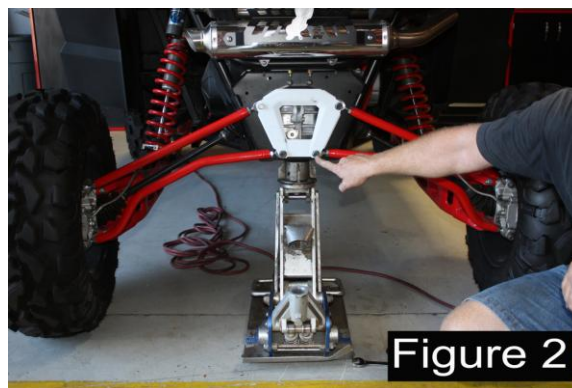

Step 4: Install your new receiver hitch in place of the rear gusset plate, secure with the 4 factory 10mm bolts retained in step 3. (See Figure 3)

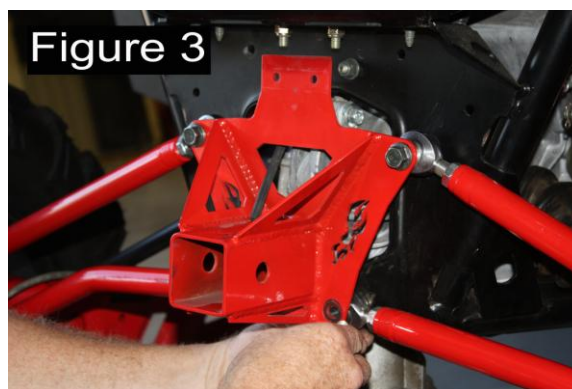

Step 5: We recommend you evenly tighten each bolt to 50 foot pounds using torque wrench. If you do not have access to a torque wrench evenly tighten hand tight using socket and wrench. Install is now complete.

### License Plate Addition

Step 1: Using supplied hardware install license plate bracket using the two holes at the top of hitch. Make sure bracket is sloping down and away from rear of vehicle. (See Figure L)



- ***For further assistance please call your authorized DragonFire dealer***
  - ***Frequently check all hardware to ensure its secure***

